

Date: Monday, 09/02/2009 7:21:06 AM
 User: Linda Lacelle

Process Sheet

Customer :	CU-DAR001 Dart Helicopters Services	Drawing Name :	FWD LEG ASS'Y
Job Number :	45600		
Estimate Number :	13175		
P.O. Number :		Part Number :	D3684047
This Issue :	09/02/2009	S.O. No. :	
Prsht Rev. :	NC	Drawing Number :	D3684 REV C
First Issue :	1/1	Project Number :	N/A
Previous Run :	45235	Drawing Revision :	C
	Type :	Material :	
	MACHINED PARTS	Due Date :	09/02/2009
Written By :		Qty:	2
Checked & Approved By :		Um:	Each
Comment :	Est Rev:A new issue 08-02-12 DD verified by:JLM Est Rev:B As per Rev B 09-01-07 JLM Verified By:EC Est Rev:C Added sealant note as per Rev C 09-01-20 JLM Verified By:DD		

Additional Product

Job Number:



Seq. #:

Machine Or Operation:

Description :

1.0

PACKAGING 1

PACKAGING RESOURCE #1



Comment: PACKAGING RESOURCE #1

2.0

D36881

STUD



Comment: Qty.: 1.0000 Each(s)/Unit Total: 2.0000 Each(s)

STUD

batch 44823

SP

3.0

D36891

SLEEVE



Comment: Qty.: 1.0000 Each(s)/Unit Total: 2.0000 Each(s)

SLEEVE

batch 44825

SP

4.0

D36911

STUD



Comment: Qty.: 1.0000 Each(s)/Unit Total: 2.0000 Each(s)

STUD

batch 15485

SP

5.0

D36921

SPACER



Comment: Qty.: 4.0000 Each(s)/Unit Total: 8.0000 Each(s)

SPACER

batch 44689

9/2/9

(2x)

W/O:		WORK ORDER CHANGES					
DATE	STEP	PROCEDURE CHANGE	By	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC Inspector

Part No: _____ PAR #: _____ Fault Category: _____ NCR: Yes No DQA: _____ Date: _____

Resolution: _____ Disposition: _____ QA: N/C Closed: _____ Date: _____

NCR:		WORK ORDER NON-CONFORMANCE (NCR)						
DATE	STEP	Description of NC Section A	Corrective Action Section B			Verification Section C	Approval Chief Eng	Approval QC Inspector
			Initial Chief Eng	Action Description Chief Eng	Sign & Date			

NOTE: Date & initial all entries

Date: Monday, 09/02/2009 7:21:06 AM
User: Linda Lacelle

Process Sheet

Customer: CU-DAR001 Dart Helicopters Services

Drawing Name: FWD LEG ASS'Y

Job Number: 45600

Part Number: D3684047

Job Number:



Seq. #:	Machine Or Operation:	Description :
---------	-----------------------	---------------

6.0	D36931	Rod End Bearing
-----	--------	-----------------



Comment: Qty.: 1.0000 Each(s)/Unit Total : 2.0000 Each(s)

Rod End Bearing

batch 1544691

SP

7.0	AN3C12A	Bolts
-----	---------	-------



Comment: Qty.: 2.0000 Each(s)/Unit Total : 4.0000 Each(s)

Bolts

batch M110155

SP

8.0	MS210433	Nut
-----	----------	-----



Comment: Qty.: 2.0000 Each(s)/Unit Total : 4.0000 Each(s)

Nut

batch M110023

SP

9.0	NAS509L12C	Nuts
-----	------------	------



Comment: Qty.: 1.0000 Each(s)/Unit Total : 2.0000 Each(s)

Nuts

batch M106993

SP

10.0	NAS50912C	Nuts
------	-----------	------



Comment: Qty.: 1.0000 Each(s)/Unit Total : 2.0000 Each(s)

Nuts

batch M106993

9/2/9

2x

SP

11.0	SMALL FAB 1	SMALL & MEDIUM FAB RESOURCE 1
------	-------------	-------------------------------



Comment: SMALL & MEDIUM FAB RESOURCE 1

1-Use anti-seize compound Tectly 502c Class 1, Mil-PRF-16173E or equivalent on thread and assemble as per dwg D3684 M110628

2-Assemble D3693-1 & D3691-1 Using Sikaflex -241/-291 between mating surfaces as per Dwg D3684

***Ensure holes for AN3C Bolts are free of sealant.

Torque Fastners as per Dwg D3684

AS

090209

W/O:		WORK ORDER CHANGES						
DATE	STEP	PROCEDURE CHANGE		By	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC Inspector

Part No: _____ PAR #: _____ Fault Category: _____ NCR: Yes No DQA: _____ Date: _____

Resolution: _____ Disposition: _____ QA: N/C Closed: _____ Date: _____

NCR:		WORK ORDER NON-CONFORMANCE (NCR)						
DATE	STEP	Description of NC Section A	Corrective Action Section B			Verification Section C	Approval Chief Eng	Approval QC Inspector
			Initial Chief Eng	Action Description Chief Eng	Sign & Date			

NOTE: Date & initial all entries

Date: Monday, 09/02/2009 7:21:06 AM
User: Linda Lacelle

Process Sheet

Customer: CU-DAR001 Dart Helicopters Services

Drawing Name: FWD LEG ASS'Y

Job Number: 45600

Part Number: D3684047

Job Number:



Seq. #:

Machine Or Operation:

Description :

12.0

QC5

INSPECT WORK TO CURRENT STEP



Comment: INSPECT WORK TO CURRENT STEP

502/02/09 (+2)

13.0

PACKAGING 1

PACKAGING RESOURCE #1



Comment: PACKAGING RESOURCE #1

Identify with Dart part # using a fine point permanent marker and Stock

Location: _____

1 used on w/o # 45522

P/n D3684-043

1 used on w/o # 45525

14.0

QC21

FINAL INSPECTION/W/O RELEASE



Comment: FINAL INSPECTION/W/O RELEASE

D3685-041

09/02/10 (+2)

Job Completion



MF 09-02-09

W/O:		WORK ORDER CHANGES					
DATE	STEP	PROCEDURE CHANGE	By	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC Inspector


Part No: _____ PAR #: _____ Fault Category: _____ NCR: Yes No DQA: _____ Date: _____

Resolution: _____ Disposition: _____ QA: N/C Closed: _____ Date: _____

NCR:		WORK ORDER NON-CONFORMANCE (NCR)						
DATE	STEP	Description of NC Section A	Corrective Action Section B			Verification Section C	Approval Chief Eng	Approval QC Inspector
			Initial Chief Eng	Action Description Chief Eng	Sign & Date			

NOTE: Date & initial all entries

ITEM	QTY -041	PART NUMBER	DESCRIPTION
1	X	D3684-041	TRIPOD MOUNT ASSEMBLY
2	1	D3684-043	MOUNT ASSEMBLY
3	1	D3684-045	INBOARD LEG ASSEMBLY
4	4	D3692-1	SPACER
5	2	AN3C-12A	BOLT
6	2	MS21043-3	NUT

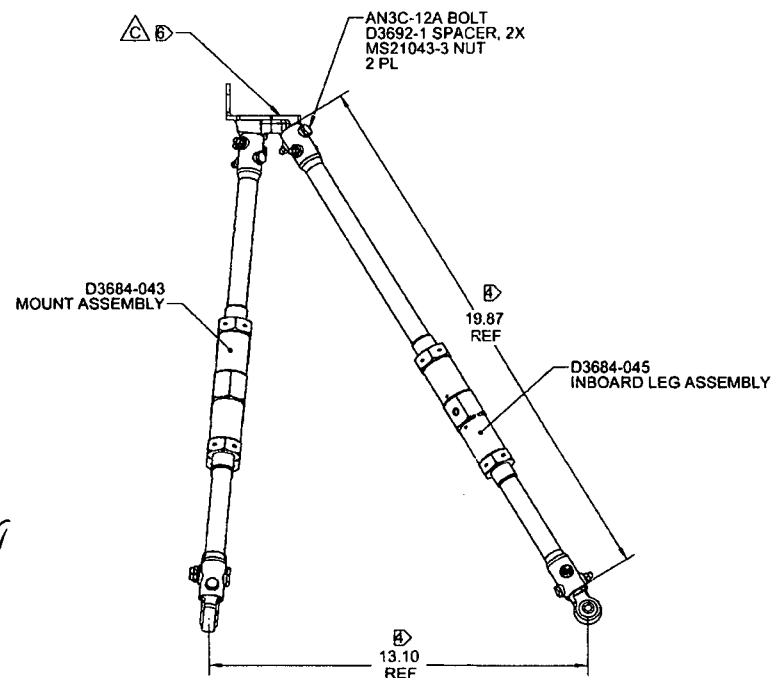


D3684-041 TRIPOD MOUNT ASSY

NOTES:

- 1) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 2) UNITS: INCHES UNLESS OTHERWISE NOTED
- 3) IDENTIFICATION: NONE
- 4) DIMENSIONS SHOWN ARE WHEN D3688-1/-3/-5 & D3691-1 STUDS ARE FULLY THREADED INTO D3689-1 SLEEVES
- 5) WEIGHT: 9.9 lbs

- 6) ASSEMBLE D3684-045 WITH D3684-043 USING SIKAFLEX-241/-291 OR PROSEAL 890 OR MIL-S-8802 CLASS 'B2' SEALANT BETWEEN MATING SURFACES. ENSURE HOLES FOR AN3C BOLTS ARE CLEAR OF SEALANT
- 7) ASSEMBLY SHOWN FOR REF ONLY, -041 IS PACKAGED UNASSEMBLED

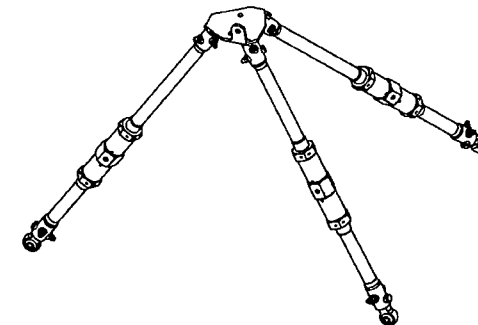

RELEASED
08/12/15

C	NOW ASSEMBLED USING SEALANT (ZN A8-1, D6-1, A8-2, D4-2, A8-3, B4-3, A8-4, B4-4, A8-5, B5-5); ASSEMBLY NOW SHOWN FOR REF ONLY (ZN A8-1, A4-1)	RF	08.12.15
B	19.82 WAS 19.50 (ZN C6-2); 9.20 WAS 9.70 (ZN C8-2); 20.74 WAS 21.24 (ZN C6-4); 6.95 WAS 6.88 (ZND5-5); MODIFIED PER PROTOTYPE INSTALLATION; REFORMATTED TO CURRENT DWG STANDARDS	RF	08.11.24
A	NEW ISSUE	RF	08.05.22
REV.	DESCRIPTION	BY	DATE
DESIGN	RF	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	RF		
CHECKED		DRAWING NO.	REV. C
MFG. APPR.		D3684	SHEET 1 OF 5
APPROVED		TITLE	SCALE
DE APPR.		TRIPOD MOUNT ASSY	NTS
DATE	08.12.15	<small>COPYRIGHT © 2008 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.</small>	

W/O:		WORK ORDER CHANGES						
DATE	STEP	PROCEDURE CHANGE	By	Date	Qty	Approval Chief Eng / Prod Mgr	Approval QC Inspector	



Part No: _____ PAR #: _____ Fault Category: _____ NCR: Yes No DQA: _____ Date: _____

Resolution: _____ Disposition: _____ QA: N/C Closed: _____ Date: _____

NCR:		WORK ORDER NON-CONFORMANCE (NCR)						
DATE	STEP	Description of NC Section A	Corrective Action Section B			Verification Section C	Approval Chief Eng	Approval QC Inspector
			Initial Chief Eng	Action Description Chief Eng	Sign & Date			

NOTE: Date & initial all entries

ITEM	QTY -043	PART NUMBER	DESCRIPTION
1	X	D3684-043	MOUNT ASSEMBLY
2	1	D3687-1	MOUNT
3	1	D3684-047	FWD LEG ASSY
4	1	D3684-049	AFT LEG ASSY
5	8	D3692-1	SPACER
6	4	AN3C-12A	BOLT
7	4	MS21043-3	NUT

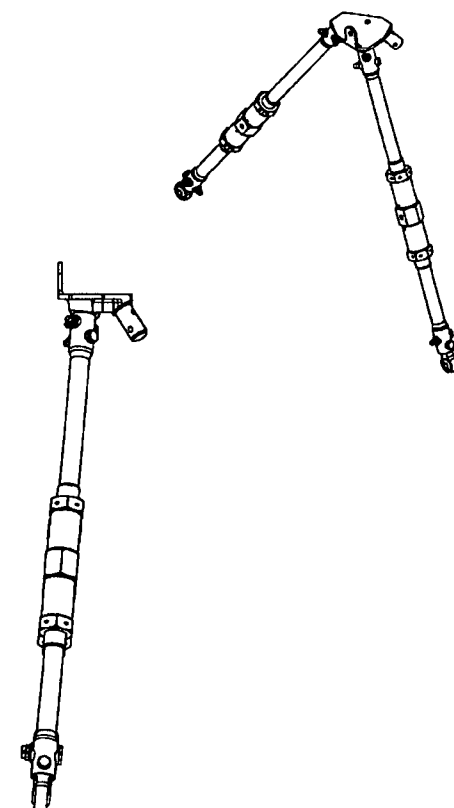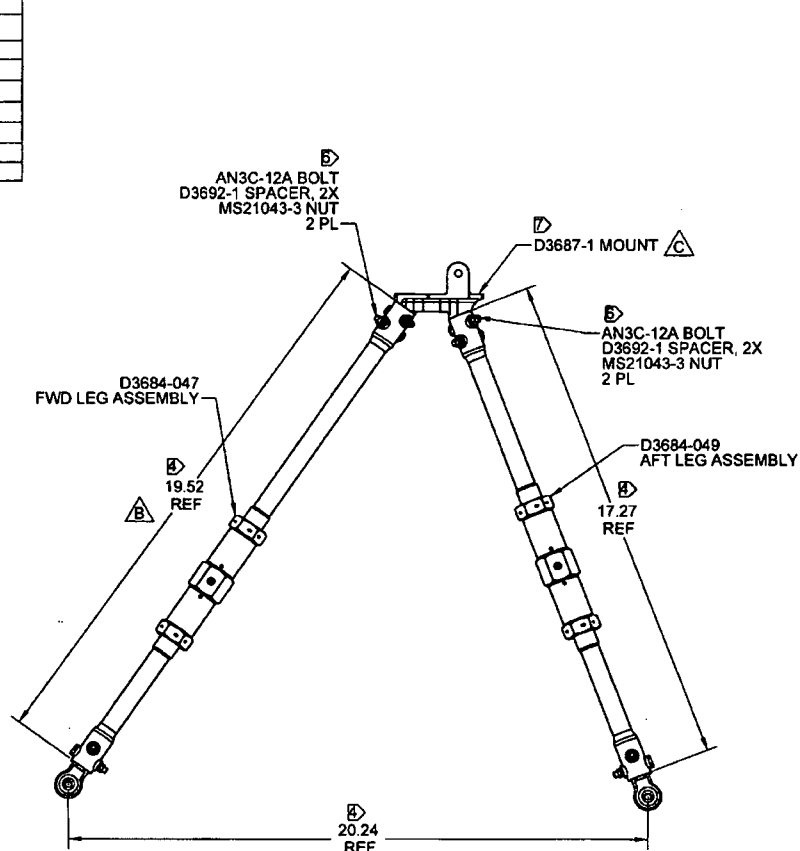

D3684-043 MOUNT ASSEMBLY


NOTES:

- 1) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 2) UNITS: INCHES UNLESS OTHERWISE NOTED
- 3) IDENTIFICATION: IDENTIFY WITH DART ASSEMBLY P/N D3684-043 USING FINE POINT PERMANENT INK MARKER
- 4) DIMENSIONS SHOWN ARE WHEN D3688-1/3 & D3691-1 STUDS ARE FULLY THREADED INTO D3689-1 SLEEVES
- 5) WEIGHT: 6.6 lbs
- 6) TORQUE FASTENERS TO 20-25 in-lbs
- 7) ASSEMBLE D3684-047 & D3684-049 WITH D3687-1 USING SIKAFLEX-241/291 OR PROSEAL 890 OR MIL-S-8802 CLASS 'B2' SEALANT BETWEEN MATING SURFACES. ENSURE HOLES FOR AN3C BOLTS ARE CLEAR OF SEALANT

DESIGN	RF	DART AEROSPACE LTD	
DRAWN	RF	HAWKESBURY, ONTARIO, CANADA	
CHECKED	RF	DRAWING NO.	REV. C
MFG. APPR.	RF	D3684	SHEET 2 OF 6
APPROVED	RF	TITLE	SCALE
DE APPR.	RF	TRIPOD MOUNT ASSY	NTS
DATE	08.12.15	COPYRIGHT © 2008 BY DART AEROSPACE LTD	
THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR REPRODUCED IN ANY MANNER WITHOUT THE WRITTEN PERMISSION FROM DART AEROSPACE LTD.			

RELEASED
09/01/12

ITEM	QTY -045	PART NUMBER	DESCRIPTION
1	X	D3684-045	INBOARD LEG ASSEMBLY
2	1	D3688-5	STUD
3	1	D3689-1	SLEEVE
4	1	D3691-1	STUD
5	4	D3692-1	SPACER
6	1	D3693-1	ROD END BEARING
7	2	AN3C-12A	BOLT
8	2	MS21043-3	NUT
9	1	NAS509L-12C	NUT
10	1	NAS509-12C	NUT

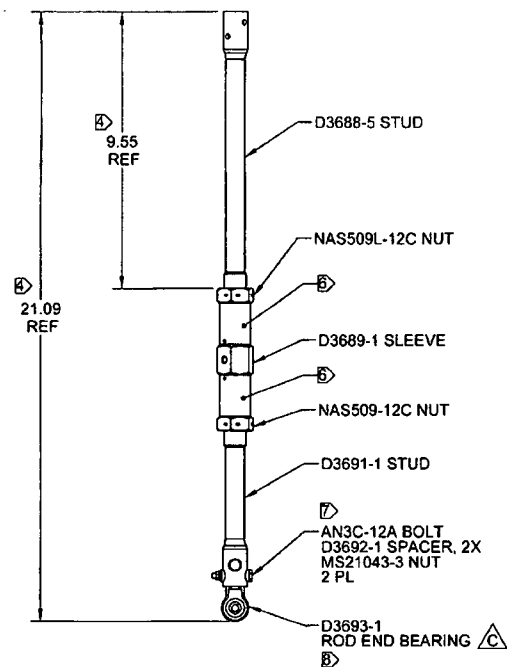

D3684-045 INBOARD LEG ASSEMBLY


RELEASED
09/01/2010

NOTES:

- 1) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 2) UNITS: INCHES UNLESS OTHERWISE NOTED
- 3) IDENTIFICATION: IDENTIFY WITH DART ASSEMBLY P/N D3684-045 USING FINE POINT PERMANENT INK MARKER
- 4) DIMENSION SHOWN IS WHEN D3688-5 & D3691-1 STUDS ARE FULLY THREADED INTO D3689-1 SLEEVE
- 5) WEIGHT: 3.1 lbs
- 6) USE TECTYL 502C CLASS I, MIL-PRF-16173E GRADE 2 OR EQUIVALENT ANTI-SEIZE COMPOUND ON THREAD
- 7) TORQUE FASTENERS TO 20-25 in-lbs
- 8) ASSEMBLE D3693-1 WITH D3691-1 USING SIKAFLEX-241/-291 OR PROSEAL 890 OR MIL-S-8802 CLASS 'B2' SEALANT BETWEEN MATING SURFACES. ENSURE HOLES FOR AN3C BOLTS ARE CLEAR OF SEALANT

DESIGN	RF	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	RF		
CHECKED	RF	DRAWING NO. D3684	REV. C
MFG. APPR.	RF		SHEET 3 OF 5
APPROVED	RF	TITLE TRIPOD MOUNT ASSY	SCALE NTS
DE APPR.	RF		
DATE	08.12.15	COPYRIGHT © 2008 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSES OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD	

ITEM	QTY -047	PART NUMBER	DESCRIPTION
1	X	D3684-047	FWD LEG ASSEMBLY
2	1	D3688-1	STUD
3	1	D3689-1	SLEEVE
4	1	D3691-1	STUD
5	4	D3692-1	SPACER
6	1	D3693-1	ROD END BEARING
7	2	AN3C-12A	BOLT
8	2	MS21043-3	NUT
9	1	NAS509L-12C	NUT
10	1	NAS509-12C	NUT

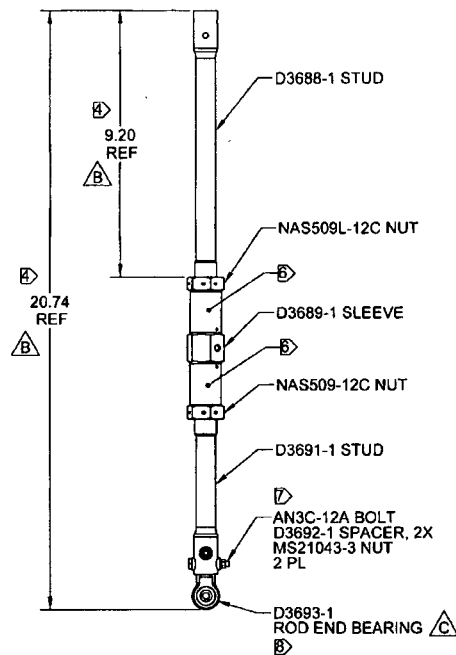

D3684-047 FWD LEG ASSEMBLY




NOTES:

- 1) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 2) UNITS: INCHES UNLESS OTHERWISE NOTED
- 3) IDENTIFICATION: NONE
- 4) DIMENSION SHOWN IS WHEN D3688-1 & D3691-1 STUDS ARE FULLY THREADED INTO D3689-1 SLEEVE
- 5) WEIGHT: 3.10 lbs
- 6) USE TECTYL 502C CLASS I, MIL-PRF-16173E GRADE 2 OR EQUIVALENT ANTI-SEIZE COMPOUND ON THREAD
- 7) TORQUE FASTENERS TO 20-25 in-lbs
- 8) ASSEMBLE D3693-1 WITH D3691-1 USING SIKAFLEX-241/-291 OR PROSEAL 890 OR MIL-S-8802 CLASS 'B2' SEALANT BETWEEN MATING SURFACES. ENSURE HOLES FOR AN3C BOLTS ARE CLEAR OF SEALANT

DESIGN	RF	DART AEROSPACE LTD	
DRAWN	RF	HAWKESBURY, ONTARIO, CANADA	
CHECKED		DRAWING NO.	REV. C
MFG. APPR.		D3684	SHEET 4 OF 5
APPROVED		TITLE	SCALE
DE APPR.		TRIPOD MOUNT ASSY	NTS
DATE	08.12.15	COPYRIGHT © 2008 BY DART AEROSPACE LTD	

RELEASED
09/01/12

ITEM	QTY -049	PART NUMBER	DESCRIPTION
1	X	D3684-049	AFT LEG ASSEMBLY
2	1	D3688-3	STUD
3	1	D3689-1	SLEEVE
4	1	D3691-1	STUD
5	4	D3692-1	SPACER
6	1	D3693-1	ROD END BEARING
7	2	AN3C-12A	BOLT
8	2	MS21043-3	NUT
9	1	NAS509L-12C	NUT
10	1	NAS509-12C	NUT

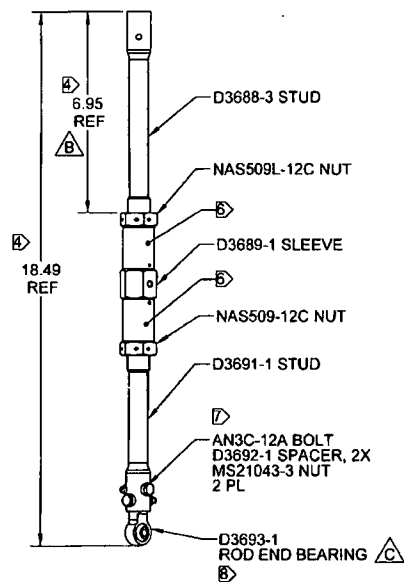

D3684-049 AFT LEG ASSEMBLY

NOTES:

- 1) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
- 2) UNITS: INCHES UNLESS OTHERWISE NOTED
- 3) IDENTIFICATION: NONE
- 4) DIMENSION SHOWN IS WHEN D3688-3 & D3691-1 STUDS ARE FULLY THREADED INTO D3689-1 SLEEVE
- 5) WEIGHT: 2.88 lbs
- 6) USE TECTYL 502C CLASS I, MIL-PRF-16173E GRADE 2 OR EQUIVALENT ANTI-SEIZE COMPOUND ON THREAD
- 7) TORQUE FASTENERS TO 20-25 in.-lbs
- 8) ASSEMBLE D3693-1 WITH D3691-1 USING SIKAFLEX-241/-291 OR PROSEAL 890 OR MIL-S-8802 CLASS 'B2' SEALANT BETWEEN MATING SURFACES. ENSURE HOLES FOR AN3C BOLTS ARE CLEAR OF SEALANT

DESIGN	RF	DART AEROSPACE LTD	
DRAWN	RF	HAWKESBURY, ONTARIO, CANADA	
CHECKED		DRAWING NO.	REV. C
MFG. APPR.		D3684	SHEET 5 OF 5
APPROVED		TITLE	SCALE
DE APPR.		TRIPOD MOUNT ASSY	NTS
DATE	08.12.15	COPYRIGHT © 2008 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD	

RELEASED
09/01/16

